

PRODUCT SPECIFICATION

PX0508-OLED DMX512 Decoder&Master



5 channels output, the maximum current of 8A /ch for RGBWY decoder, up to 960W
OLED Screen and touch button, more convenient operation
Can be used as stand alone DMX Master controller
8 bit / 16 bit resolution optional
Multiple dimming curve: (0.1~9.9), liner, log

Summary

Welcome to use PX series DMX512/RDM decoder & driver. PX series adopt the advanced micro-computer control technology and converted the DMX512,RDM/2009 digital signal widely used in international to the PWM control signal. 1~5 channels output for option and each channel able to achieve 256 or 65536 gradations of controlling, and also it can be used as the connector of PC digital light controller and analog light modulator. It is mainly used for the controlling of buildings & lights applied LED.


Product Features

- 5 channels output, the maximum current of 8A /ch for RGBWY decoder, up to 960W
- Can be used as stand alone DMX Master controller
- OLED Screen and touch button, more convenient operation
- 27 sence modes built-in, with speed and brightness adjust function
- 5 kinds of optional: DIM, CT, RGB, RGBW, RGBWY
- 2 kinds of DMX ports: XLR-5, RJ45
- Short-circuit protection, overload protection, over-temperature protection
- Fast self-testing function
- 8 bit / 16 bit resolution optional(master mode support 8bit only)
- Multiple dimming curve: (0.1~9.9), liner, log
- Meets DMX512/1990,RDM /2009 protocol
- Supported RDM parameters:
 - DISC_UNIQUE_BRANCH
 - DISC_MUTE
 - DISC_UN_MUTE
 - DEVICE_INFO
 - SOFTWARE_VERSION_LABEL
 - DMX512/RDM_START_ADDRESS
 - IDENTIFY_DEVICE
 - MANUFACTURER_LABEL
 - SUPPORTED_PARAMETERS

Technical Parameters

Model : PX0508-OLED
 Input Signal : DMX512 1990/RDM 2009
 Input Voltage : 12~24V
 Output Voltage : 12~24V
 Output Current : 8A*5CH MAX. 40A
 Output Power : (0~96W...192W)*5CH MAX. 960W
 Control Mode : DIM/CT/RGB/RGBW/RGBWY
 Dimming Curve : 0.1~9.9/Liner/Log
 Grey Level : 8Bit (256 levels) / 16Bit (65536 levels)
 Protection : Short-Circuit / Over Load / Over Temperature
 Dimension : 125*93*36 mm (L * W * H)
 Packing Size : 145* 104*42 mm (L * W * H)
 G.W. : 365 g
 Operation Temperature : - 20 - 50 C
 Relative humidity : 20% - 90% RH

Dimension(mm)

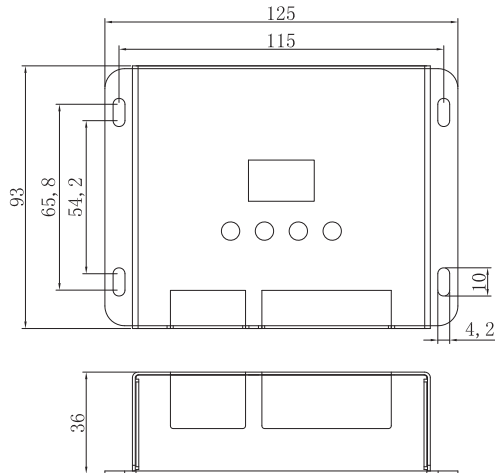


Interface Description




- (1) RJ45 DMX/RDM Signal input and output
- (2) OLED Screen
- (3) XLR-5 DMX/RDM Signal input and output
- (4) Power input interface
- (5) Green terminal LED Lamps connection

OLED Screen Description







Button Name	Function
Enter	Enter Button (focus on the option menu pointed by the cursor and enter the state of this option menu.
BACK	Back Button, return to the previous menu; exit the state of this option
Up	Move the cursor up, change the state of the option
Down	Move the cursor down; change the state of the option

The product restores the default initial page which shows the current parameter information and working status when power on again. Please press "ENTER" to homepage. If there is no operation in 1 minute, the OLED screen will restore the initial page.

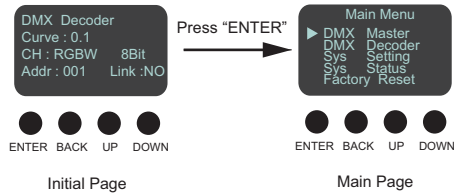

DMX Master

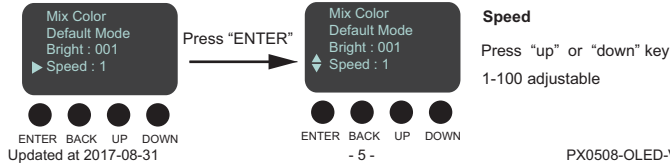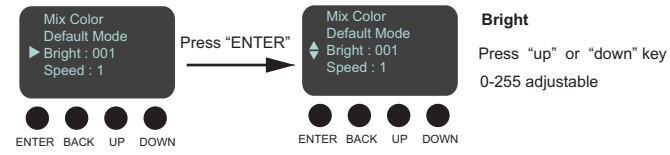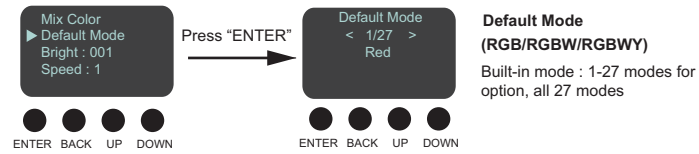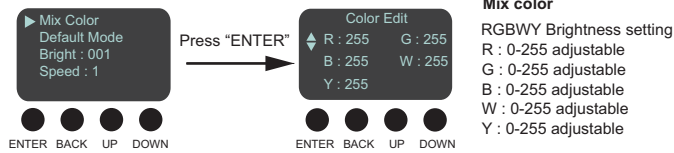


Default Mode (RGB/RGBW/RGBWY)

NO.	Mode	NO.	Mode
1	Red	15	GB Ramp
2	Green	16	RGB Ramp
3	Blue	17	ALL Ramp
4	Yellow	18	RG_Gradient
5	Cyan	19	RB_Gradient
6	Purple	20	GB_Gradient
7	White	21	RGB_Gradient
8	RG Jump	22	ALL_Gradient
9	RB Jump	23	RG_Chase
10	GB Jump	24	RB_Chase
11	RGB Jump	25	GB_Chase
12	ALL Jump	26	RGB_Chase
13	RG Ramp	27	ALL_Chase
14	RB Ramp		


Default Mode (CT)



Default Mode (DIM)

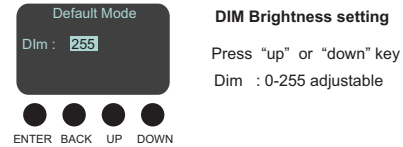


DMX Decord



DMX Address setting

Press "up" or "down" key to set DMX Address


Address : 1-511 adjustable



Dimming Curve setting

Press "up" or "down" key to set dimming curve

Curve : 0.1~9.9
Linear
Log




Resolution setting

Press "up" or "down" key to set resolution

Resolution : 8Bit
16Bit



Sys Setting



Output setting


Press "up" or "down" key to set output channel

CH : DIM
CT
RGB
RGBW
RGBWY



Lock : ON
Screen will be locked if unmaned operation for 1 min , press "Enter" key for 3s to unlock


Sys Status




OTP/OCP/SCP Status

When you use DMX decoders after the wiring completed, you can check the short circuit, over current, over load problems in this page once the fault occurs and the "OK" will switch to "Warning" on the screen.

Factory Reset



Self -testing




Quick self-testing


Press "BACK" for 3s on any page

Wiring Diagram


Connecting LED lights:

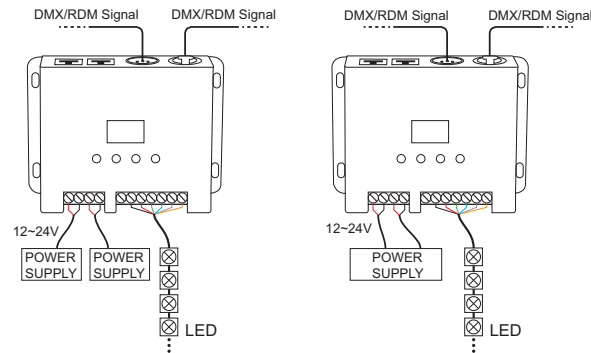

The connection diagram of 2 kinds of DMX/RDM terminals:

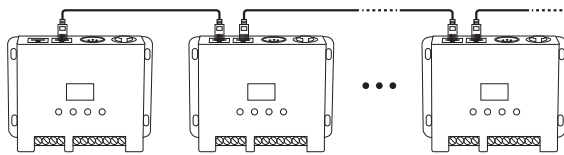

RJ45 Connected in parallel

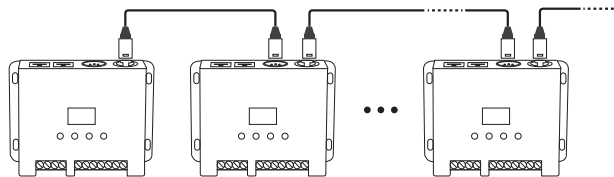

XLR-5 Connected in parallel

Address setting table

Mode	DIM	CT	RGB	RGBW	RGBY
Address Quantity	1	2	3	4	5
Resolution	8bit	8bit	8bit	8bit	8bit
Channel	1	001	001	001	001
	2	001	002	002	002
	3	001	001	003	003
	4	001	002	003	004
	5	001	002	003	004

Mode	DIM	CT	RGB	RGBW	RGBY
Address Quantity	2	4	6	8	10
Resolution	16bit	16bit	16bit	16bit	16bit
Channel	1	001 002	001 002	001 002	001 002
	2	001 002	003 004	003 004	003 004
	3	001 002	001 002	005 006	005 006
	4	001 002	003 004	005 006	007 008
	5	001 002	003 004	005 006	007 008